



4000KG Lifting Capacity | **130MM** Drive-on Height | **1930MM** Max. Lifting Height

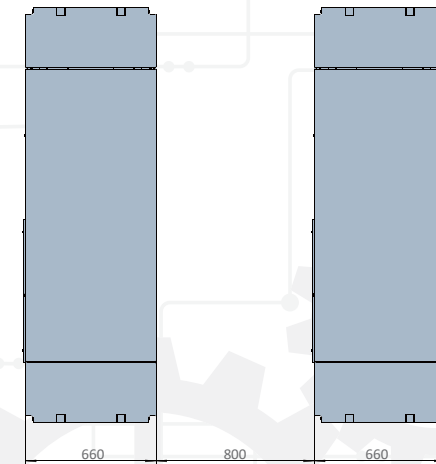

Optional ramp for lower profile

OVERALL DIMENSION

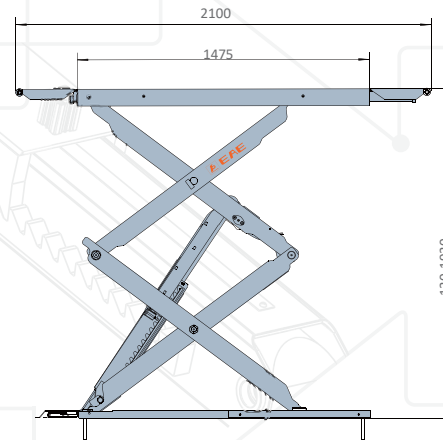

TECHNICAL DATA

MODEL NO.	EE-65A.40T
Lifting capacity	4000kg
Max lifting height	1930mm
Min height	130mm
Lifting time	60S
Motor	2.2kW
Air supply	6-8bar
Platform width	660mm
Weight	1000kg
Electricity supply	According To Customer Needs

* Machine shown with optional equipment. Actual product appearance may differ.

EE-65A.40T

FULL RISE SCISSOR LIFT

- 4000kg lifting capacity.
- Above-ground or recessed installation.
- 130mm initial height.
- Four cylinder design.
- Pneumatic released safety locking system.
- Drive-on ramps lock into position as platform extensions.
- Steady raising and lowering, no noise when lowered to ground.
- Durable cylinders with anti-surge valves.
- 24V safe control system.
- Height limit switch.
- Powder coated finish.
- Self-lubricated bushing and bearing.
- Aluminum motor with fan on top to avoid overheating caused by long time working.
- It has been proofed by dynamic test with 115% of rated capacity and static test with 150% capacity.



Anti-abrasion Slider




Height Limit Switch



Mechanical Safety Lock



24v Safe Control System



Start-Up Plate



Four Cylinder Design



In-ground installation.

SCISSOR LIFT