



5000KG | **5100MM** | **ALS**
 Max. Capacity | Max. Platform Length | Automatic Levelling System(Optional)



OVERALL DIMENSION

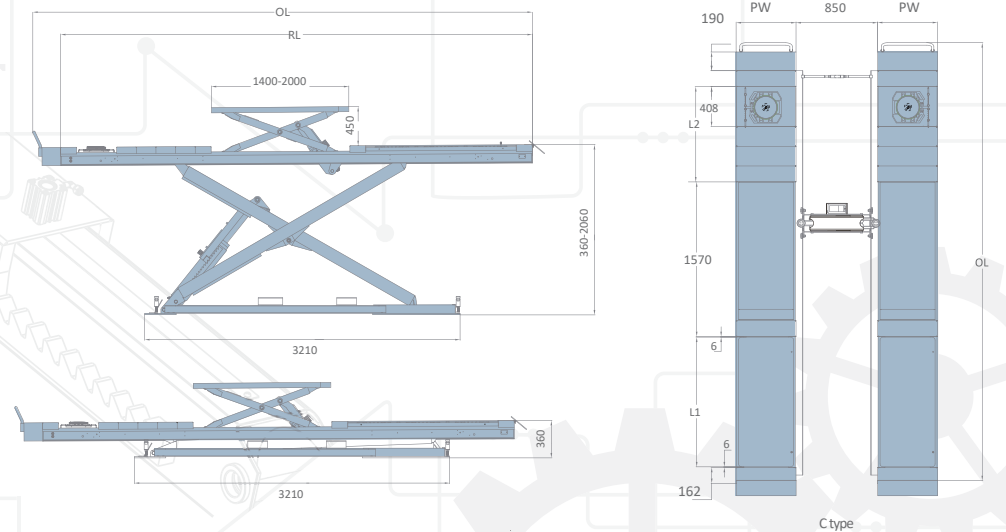

- S Flat platforms
- B Platforms with front recesses and rear slip plates
- BWF Platforms with front recesses rear slip plates, and wheel free lifts
- BWF.PD Platforms with front recesses, rear slip plates, play detector and wheel free lifts

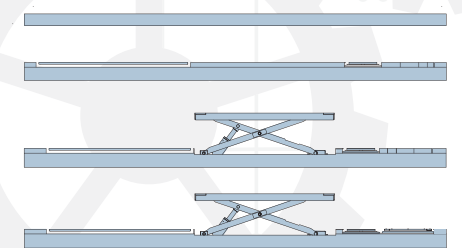

Wheel Free Lift



Pneumatic Release System



EE-6603

ALIGNMENT SCISSOR LIFT

- 4200kg/5000kg lifting capacity.
- Electrical or manual levelling.
- Infrared synchronization protection system.
- In-ground installation or above-ground installation with optional drive-on ramps.
- Long slip plate and adjustable turntable positions accommodate different sizes of wheelbases.
- Pneumatic safety locking system.
- The great planeness of runways is perfect for high accuracy wheel aligning.
- Driving-on ramps with polymer rollers.
- Reserved tracks on platforms fit for optional rolling jacks.(C Type)
- 24V safe control system.
- Self-lubricated bushing and bearing.
- Safety descent alarming buzzer.
- Aluminum motor with fan on top to avoid overheating caused by long time working.

TECHNICAL DATA

Model No.	Lifting capacity	PW	RL	OL	L1	L2
EE-6603.S.42L(C)	4200kg	610	4200	4442	N/A	N/A
EE-6603.S.48L(C)	4200kg/5000kg	610	4800	5042	N/A	N/A
EE-6603.S.51L(C)	4200kg/5000kg	610	5100	5342	N/A	N/A
EE-6603.B.42L(C)	4200kg	610	4200	4442	1320	970
EE-6603.B.48L(C)	4200kg/5000kg	610	4800	5042	1520	1370
EE-6603.B.51L(C)	4200kg/5000kg	610	5100	5342	1520	1570
EE-6603.BWF.42L(C)	4200kg	610	4200	4442	1320	970
EE-6603.BWF.48L(C)	4200kg/5000kg	610	4800	5042	1520	1370
EE-6603.BWF.51L(C)	4200kg/5000kg	610	5100	5342	1520	1570
EE-6603.BWF.PD.48L(C)	5000kg	610	4800	5042	1520	1370
EE-6603.BWF.PD.51L(C)	5000kg	610	5100	5342	1520	1570

* Machine shown with optional equipment. Actual product appearance may differ.

