

15000KG-45000KG
Lifting Capacity

8000MM
Long Runways of Each Platform

Digital Data
Reading Monitor




EE-HX15/15T



EE-HX30/30T

OVERALL DIMENSION

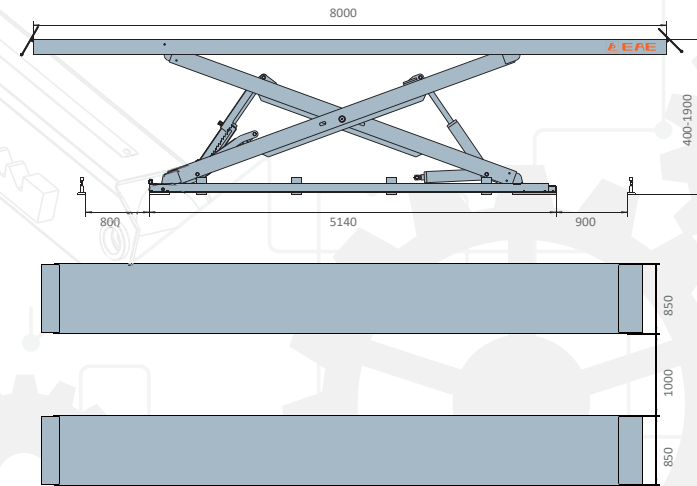

TECHNICAL DATA

| MODEL NO. | EE-HX15 |
|--|-----------------------------|
| Lifting capacity | 15000kg |
| Max. lifting height | 1900mm |
| Min. height | 400mm |
| Platform width | 850mm |
| Complete rise time under rated load | 120S |
| Complete descent time under rated load | 100S |
| Rated oil pressure | 22MPa |
| Oil reservoir | 45L |
| Air supply | 6-8bar |
| Electricity supply | According To Customer Needs |
| Phase | 3Ph |
| Motor power | 3.5kWx2 |



HEAVY DUTY LIFT



EE-HX SERIES
HEARY DUTY SCISSOR LIFT

- Hydraulic synchronization by four cylinders. The mechanical safety locking unit automatically releases before descending.
- Safe low control voltage (24V) for all control buttons and switches.
- Constantly read the height and working status of each platform through visual monitor.
- Thanks to the CLOSED-LOOP control system, the two platforms automatically align with each other during every rising and lowering cycles. In normal working, the height deviation is limited within 20mm.
- The lifting system stops working in case that the height deviation exceeds 20mm.
- At most 6 platforms can work together synchronously.



Constantly read the height and working status of each platform through visual monitor.



Limit switch to ensure the cylinders work within its maximal stroke.



Laser distance sensor



4-cylinder synchronizing structure

* Machine shown with optional equipment. Actual product appearance may differ.